

6

5

4

3




2

1

SPECIFICATIONS:
CONSTRUCTION: PER UL STANDARD 891 - SUITABLE FOR USE AS SERVICE ENTRANCE EQUIPMENT

RAINFOOF SB/SF SERVICE SEECTION SWITCHBOARD CONSISTS OF INDOOR SERVICE SECTION WITHIN A RAINPROOF ENCLOSURE. RAINPROOF ENCLOSURE IS OF BOLTED CONSTRUCTION AND CODE GAUGE STEEL. FRONT DOOR OF ENCLOSURE IS OF BULKHEAD TYPE CONSTRUCTION AND IS FURNISHED WITH A VAULT-TYPE HANDLE WHICH OPERATES A THREE-POINT DOOR LATCH MECHANISM. DOOR HANDLE HAS PROVISIONS FOR A PADLOCKING. FRONT DOOR IS DESIGNED TO ALLOW THE INSIDE METER DOOR TO OPEN FULL 90 DEGREES WITH A METER INSTALLED.

FINISH: ANSI # 61 TEXTURED POWDER COAT FINISH

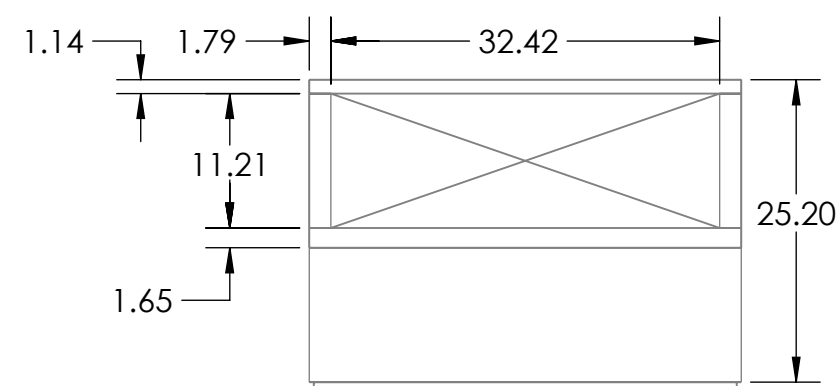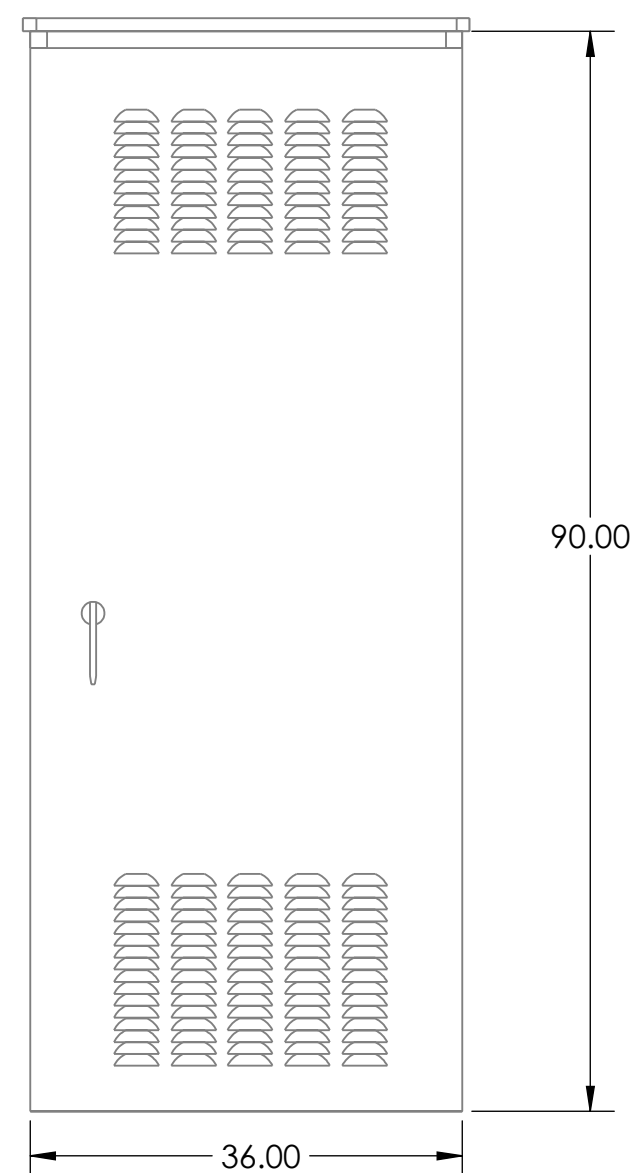

INDICATES RECOMMENED
CONDUIT AREA

NOTES:

1. UNITS OF MEASURE: INCH
2. STANDARD TOLERANCE UNLESS OTHERWISE SPECIFIED

LINEAR DIMENSION

$$\begin{aligned} X.X &= \pm 0.060 \\ X.XX &= \pm 0.030 \\ X.XXX &= \pm 0.020 \end{aligned}$$

**HOLE
DIAMETER**

$$\begin{aligned} X.XX &= \pm 0.010 \\ X.XXX &= \pm 0.003 \end{aligned}$$

ANGLE DIMENSIONED $\pm 1^\circ$
UNDIMENSIONED $90^\circ \pm 2^\circ$

MATERIAL:

FINISH:

FIRST USED ON:	
----------------	--



ECR #:	
--------	--

MASS (LBS):

REV

THIRD ANGLE

THIS DRAWING IS THE PROPERTY OF MAVERICK POWER AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED USED OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY MAVERICK POWER.

DESCRIPTION

TYPE 3R ENCLOSURE (MAIN SECTION)

DWG/PART NO.
SPEED-D011

SHT 1 OF 1

6

5

4

3

2

DO NOT SCALE DRAWING

1