
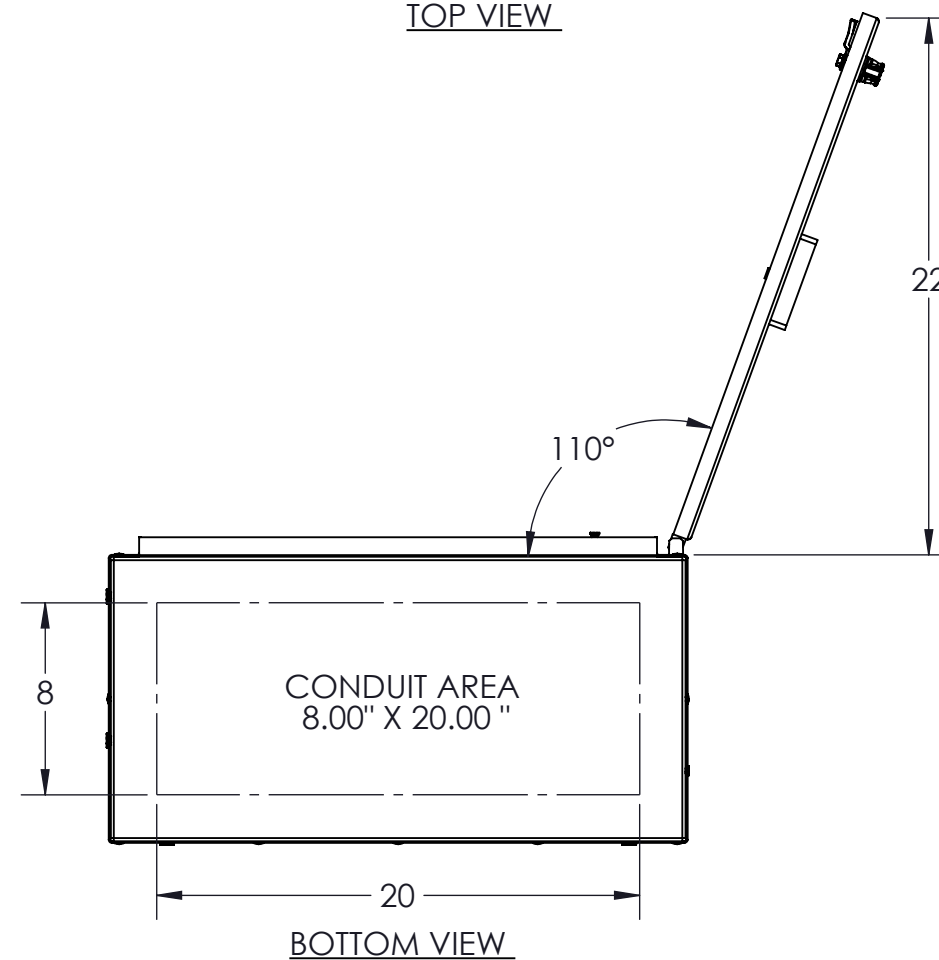
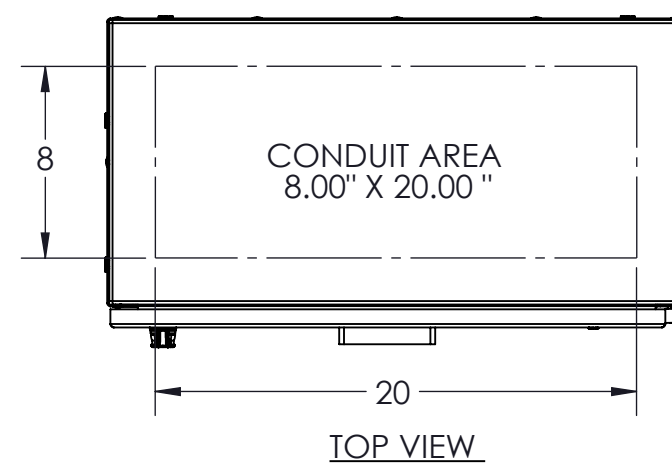
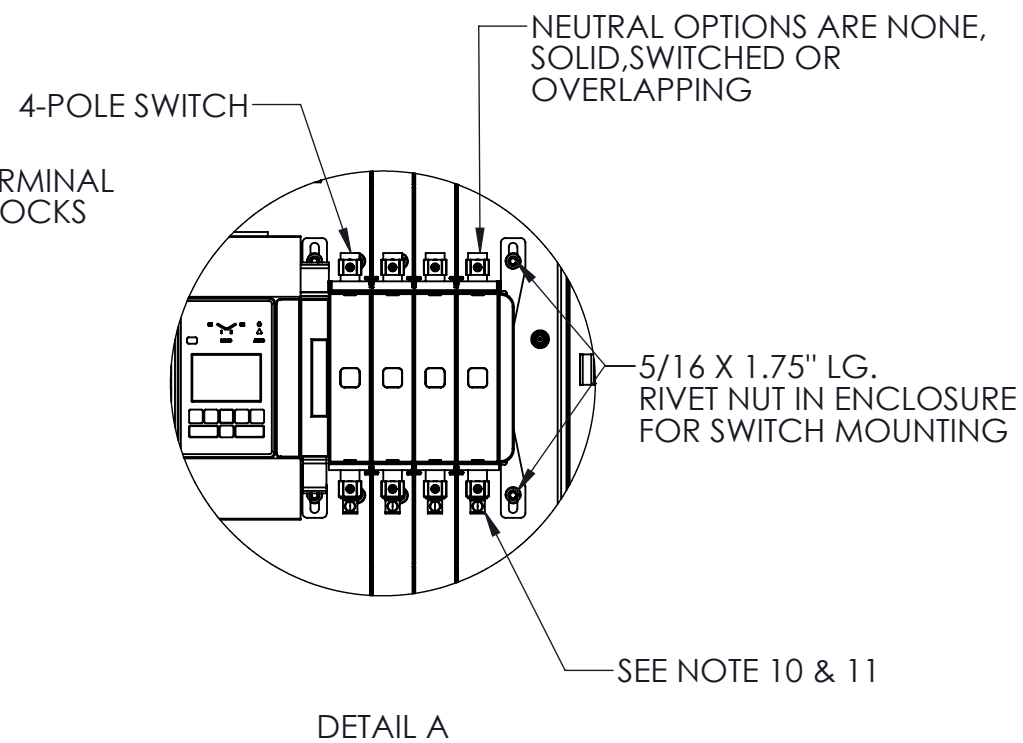
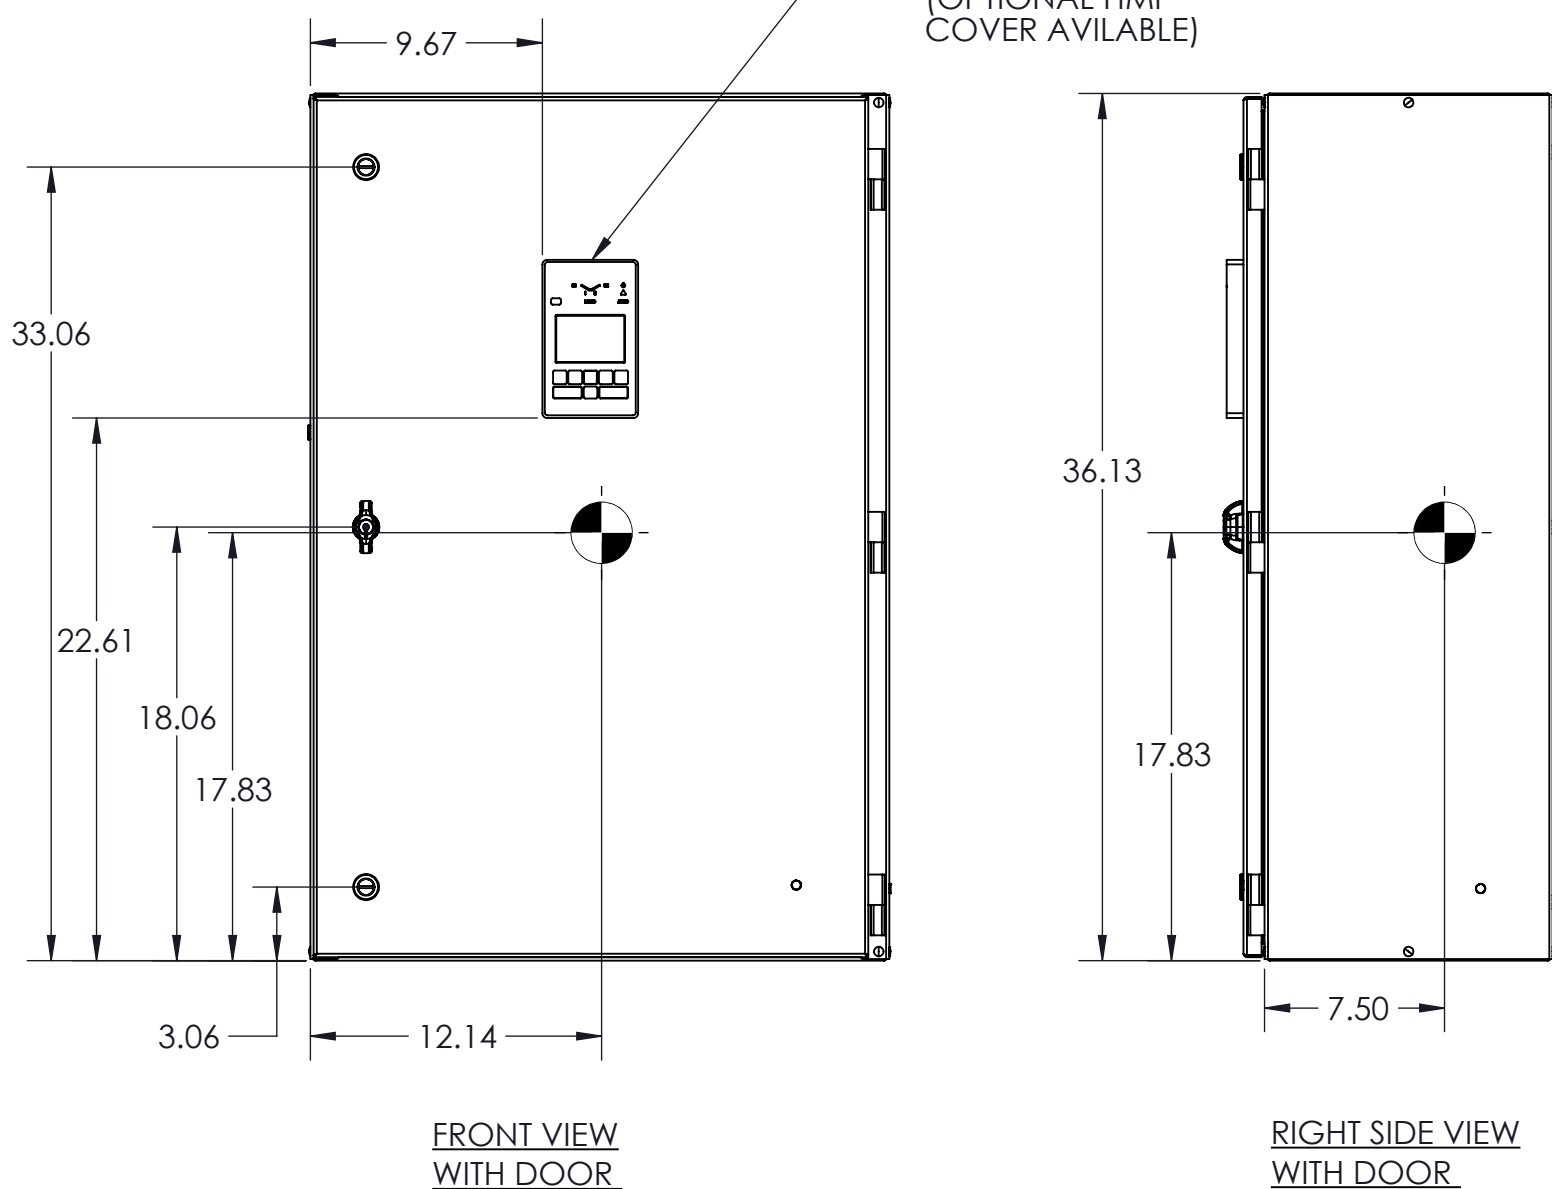


TYPE 1 ENCLOSURE

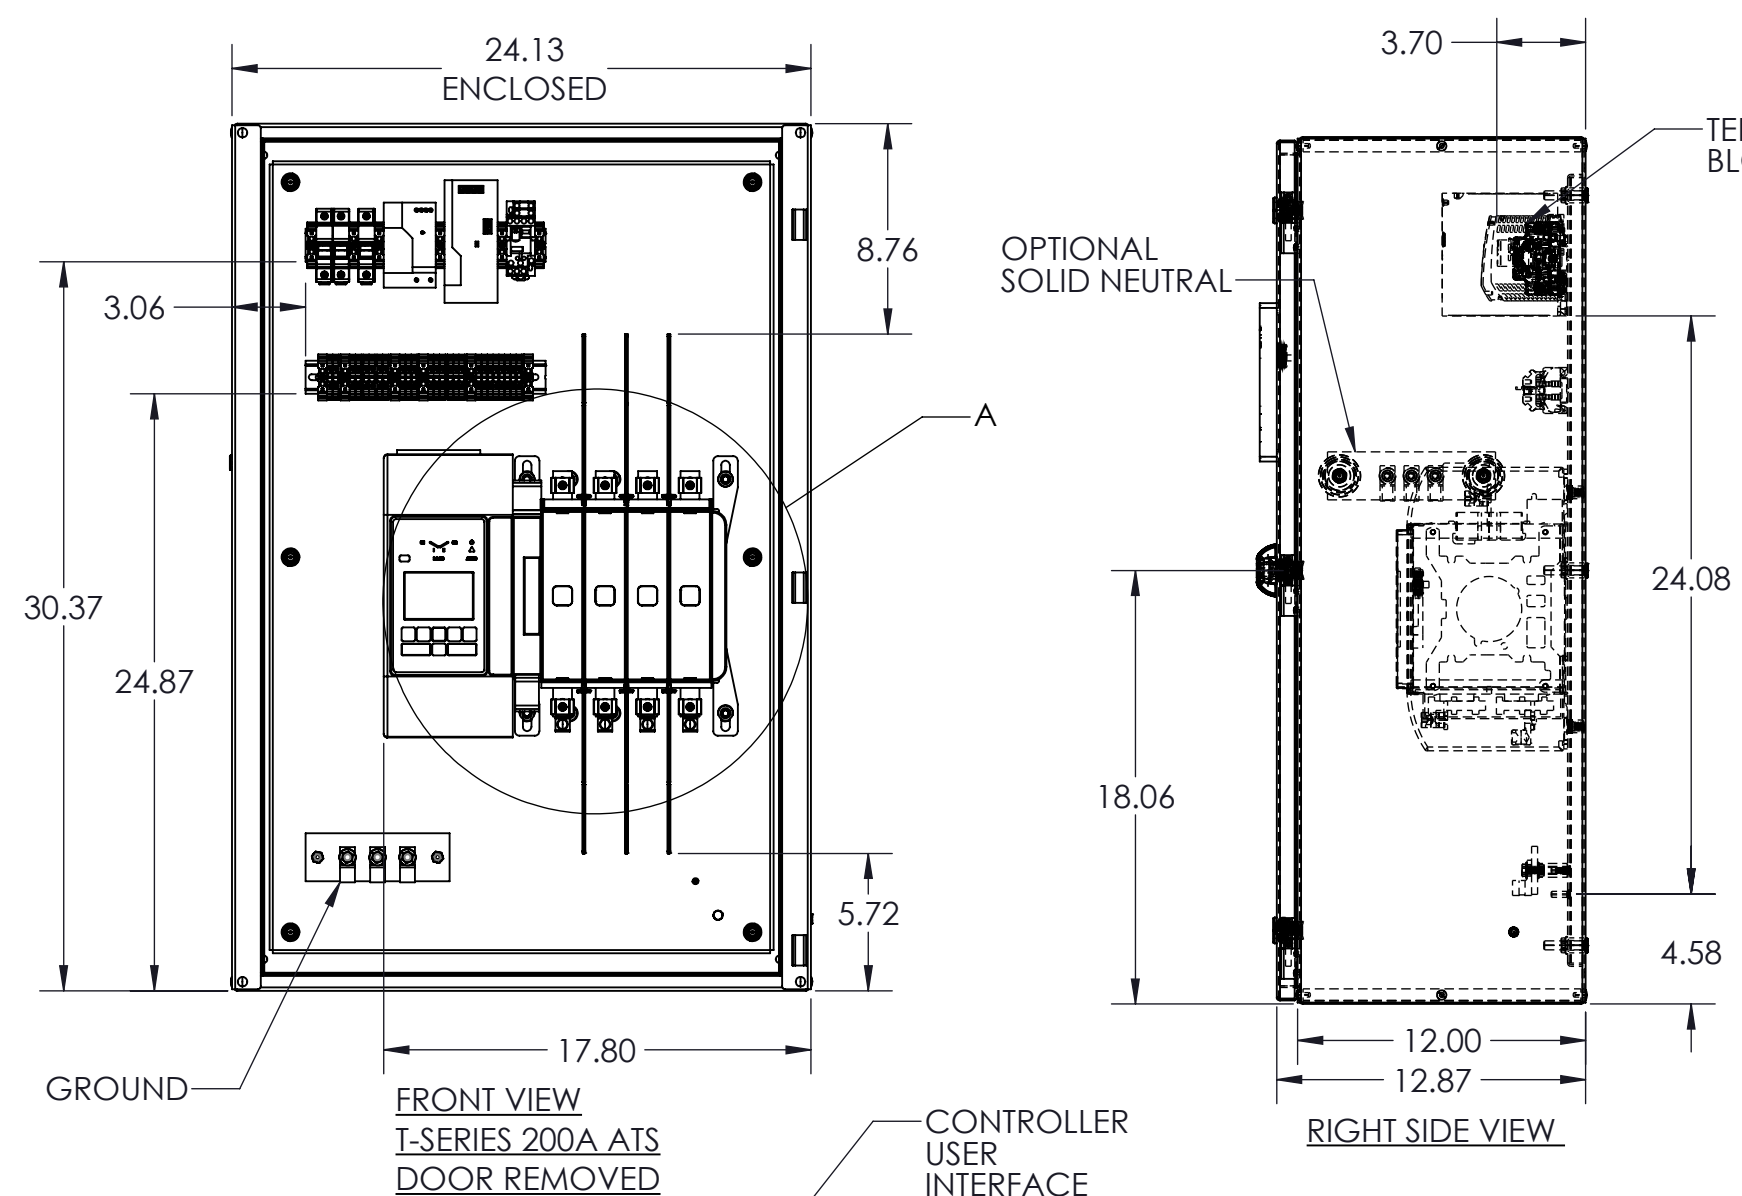

GENERAL NOTES

1. TYPE 1, 3R, 4/12,4X (304 or 316 SST) ENCLOSURE, FREE STANDING. FLOOR MOUNTED OR WALL MOUNTED. 12 GAUGE CONSTRUCTION.
2. NEC STANDARD GAUGE PAN TYPE DOOR WITH LOCKABLE HANDLE.
3. ACCESSIBILITY : DOOR EQUIPPED WITH LOCKING HANDLE
4. ENTRY: TOP & BOTTOM
5. FINISH: ANSI 61 TEXTURED GRAY POWDER COAT
6. RECOMMENDED CLEARANCES FOR DOOR OPENING:
FRONT: 24", 90 DEG. 22" AT FULL 110 DEG
7. SYSTEM VOLTAGE: 208-480 V, 1-PHASE OR 3-PHASE
8. SYSTEM AMPERAGE : 30,60,100,125,160 or 200A
9. UL 1008 LISTED, cUL CERTIFIED TO CSA 22.2, NO 178. EQUIPMENT MARKED cULus.
10. STANDARD ATS COMES WITH S1 AND S2 TERMINALS AT THE BOTTOM AND THE LOAD TERMINALS AT THE TOP. A FACTORY OPTION IS AVAILABLE TO REVERSE THE TERMINAL ORIENTATION.
11. SWITCH AVAILABLE IN 2,3 OR 4 POLE. 4 POLE SWITCH SHOWN

ESTIMATED SHIPPING WEIGHT OF THE UNIT: 100 LBS

MECHANICAL LUG ASSEMBLY	AMP	LUG RANGE
	30-60A	QTY 1 #12-2/0
	100-200A	QTY 1 4 AWG - 300 KCMIL
	GROUND	SIX (6) #2 - 250 KCMIL CU/AL CABLE CONNECTIONS

* COMES STANDARD WITH MECHANICAL LUGS. ATS MAY BE PROVIDED WITHOUT LUGS OR WITH UP TO (2) 250 KCMIL COMPRESSION LUGS.

NOTES:

1. UNITS OF MEASURE: INCH
2. STANDARD TOLERANCE UNLESS OTHERWISE SPECIFIED

LINEAR DIMENSION	$X.X = \pm 0.060$ $X.XX = \pm 0.030$ $X.XXX = \pm 0.020$
HOLE DIAMETER	$X.XX = \pm 0.010$ $X.XXX = \pm 0.003$
ANGLE	DIMENSIONED $\pm 1^\circ$ UNDIMENSIONED $90^\circ \pm 2^\circ$

MATERIAL:
SEE PART LIST

FINISH:
SEE PART LIST

	FIRST USED ON:
--	----------------

**MP MAVERICK
POWER**

ECR #:	
--------	--

MASS (LBS):	100 LBS
-------------	---------

RFV

A

THIRD ANGLE

DESCRIPTION

T-SERIES ATS: 30-200A

DWG/PART NO.





TATS-200

THIS DRAWING IS THE PROPERTY OF MAVERICK POWER AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED USED OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY MAVERICK POWER.


SHT 1 OF 2

DO NOT SCALE DRAWING


TYPE 3R/ 4/12, 4X ENCLOSURE

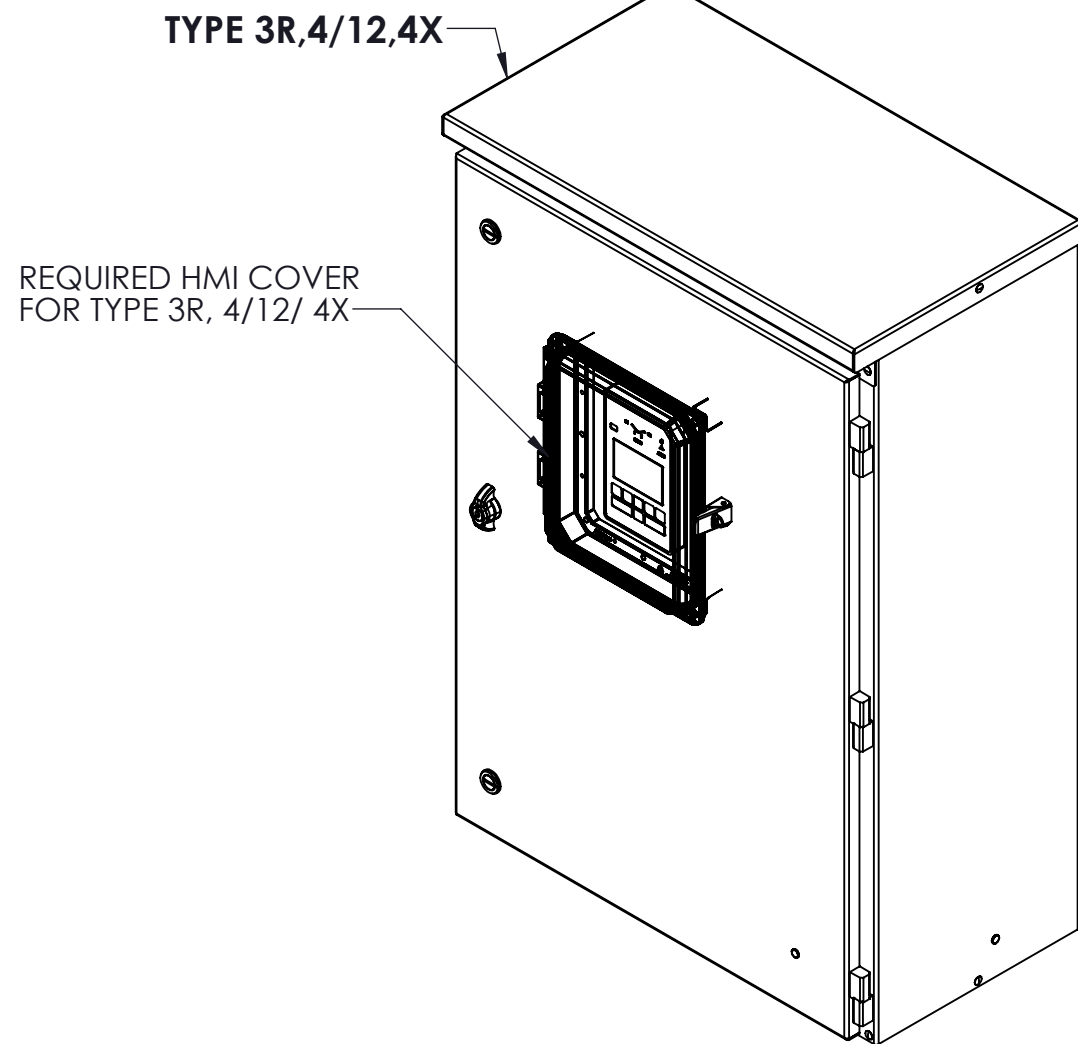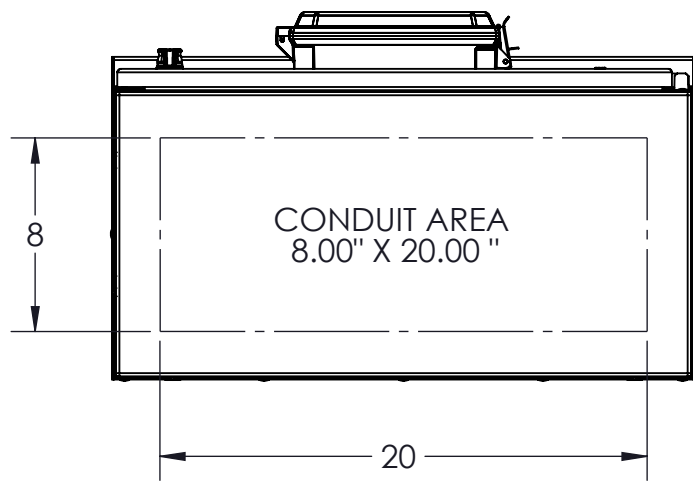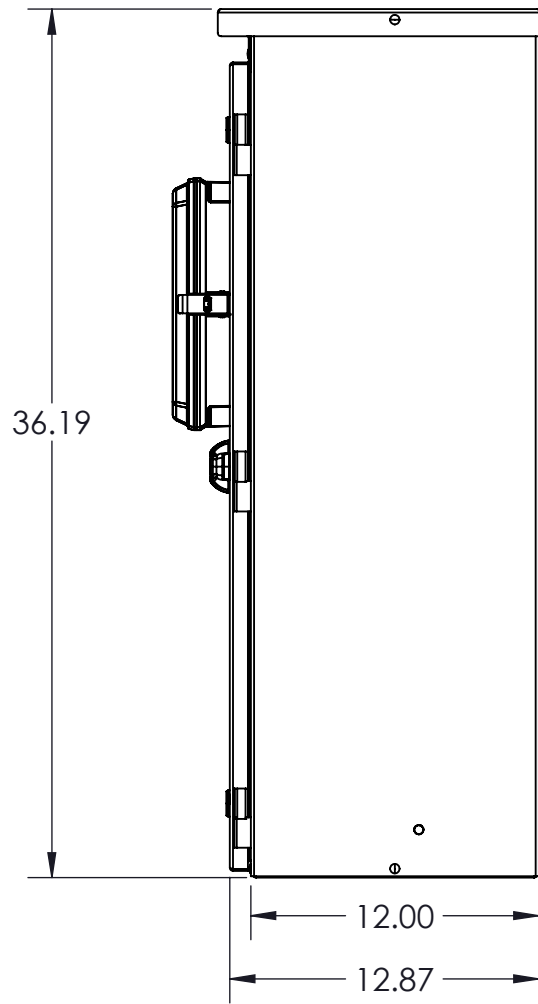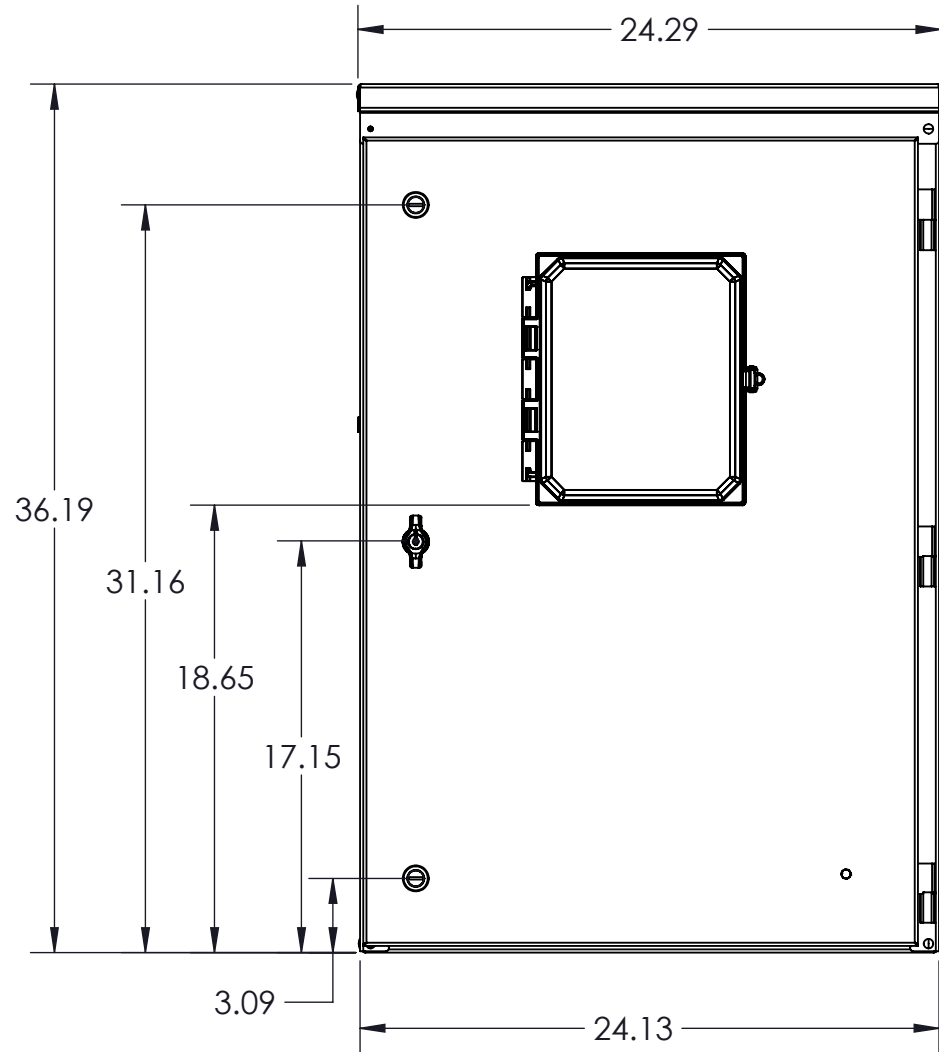

MOUNTING DETAILS
(WALL MOUNTED)

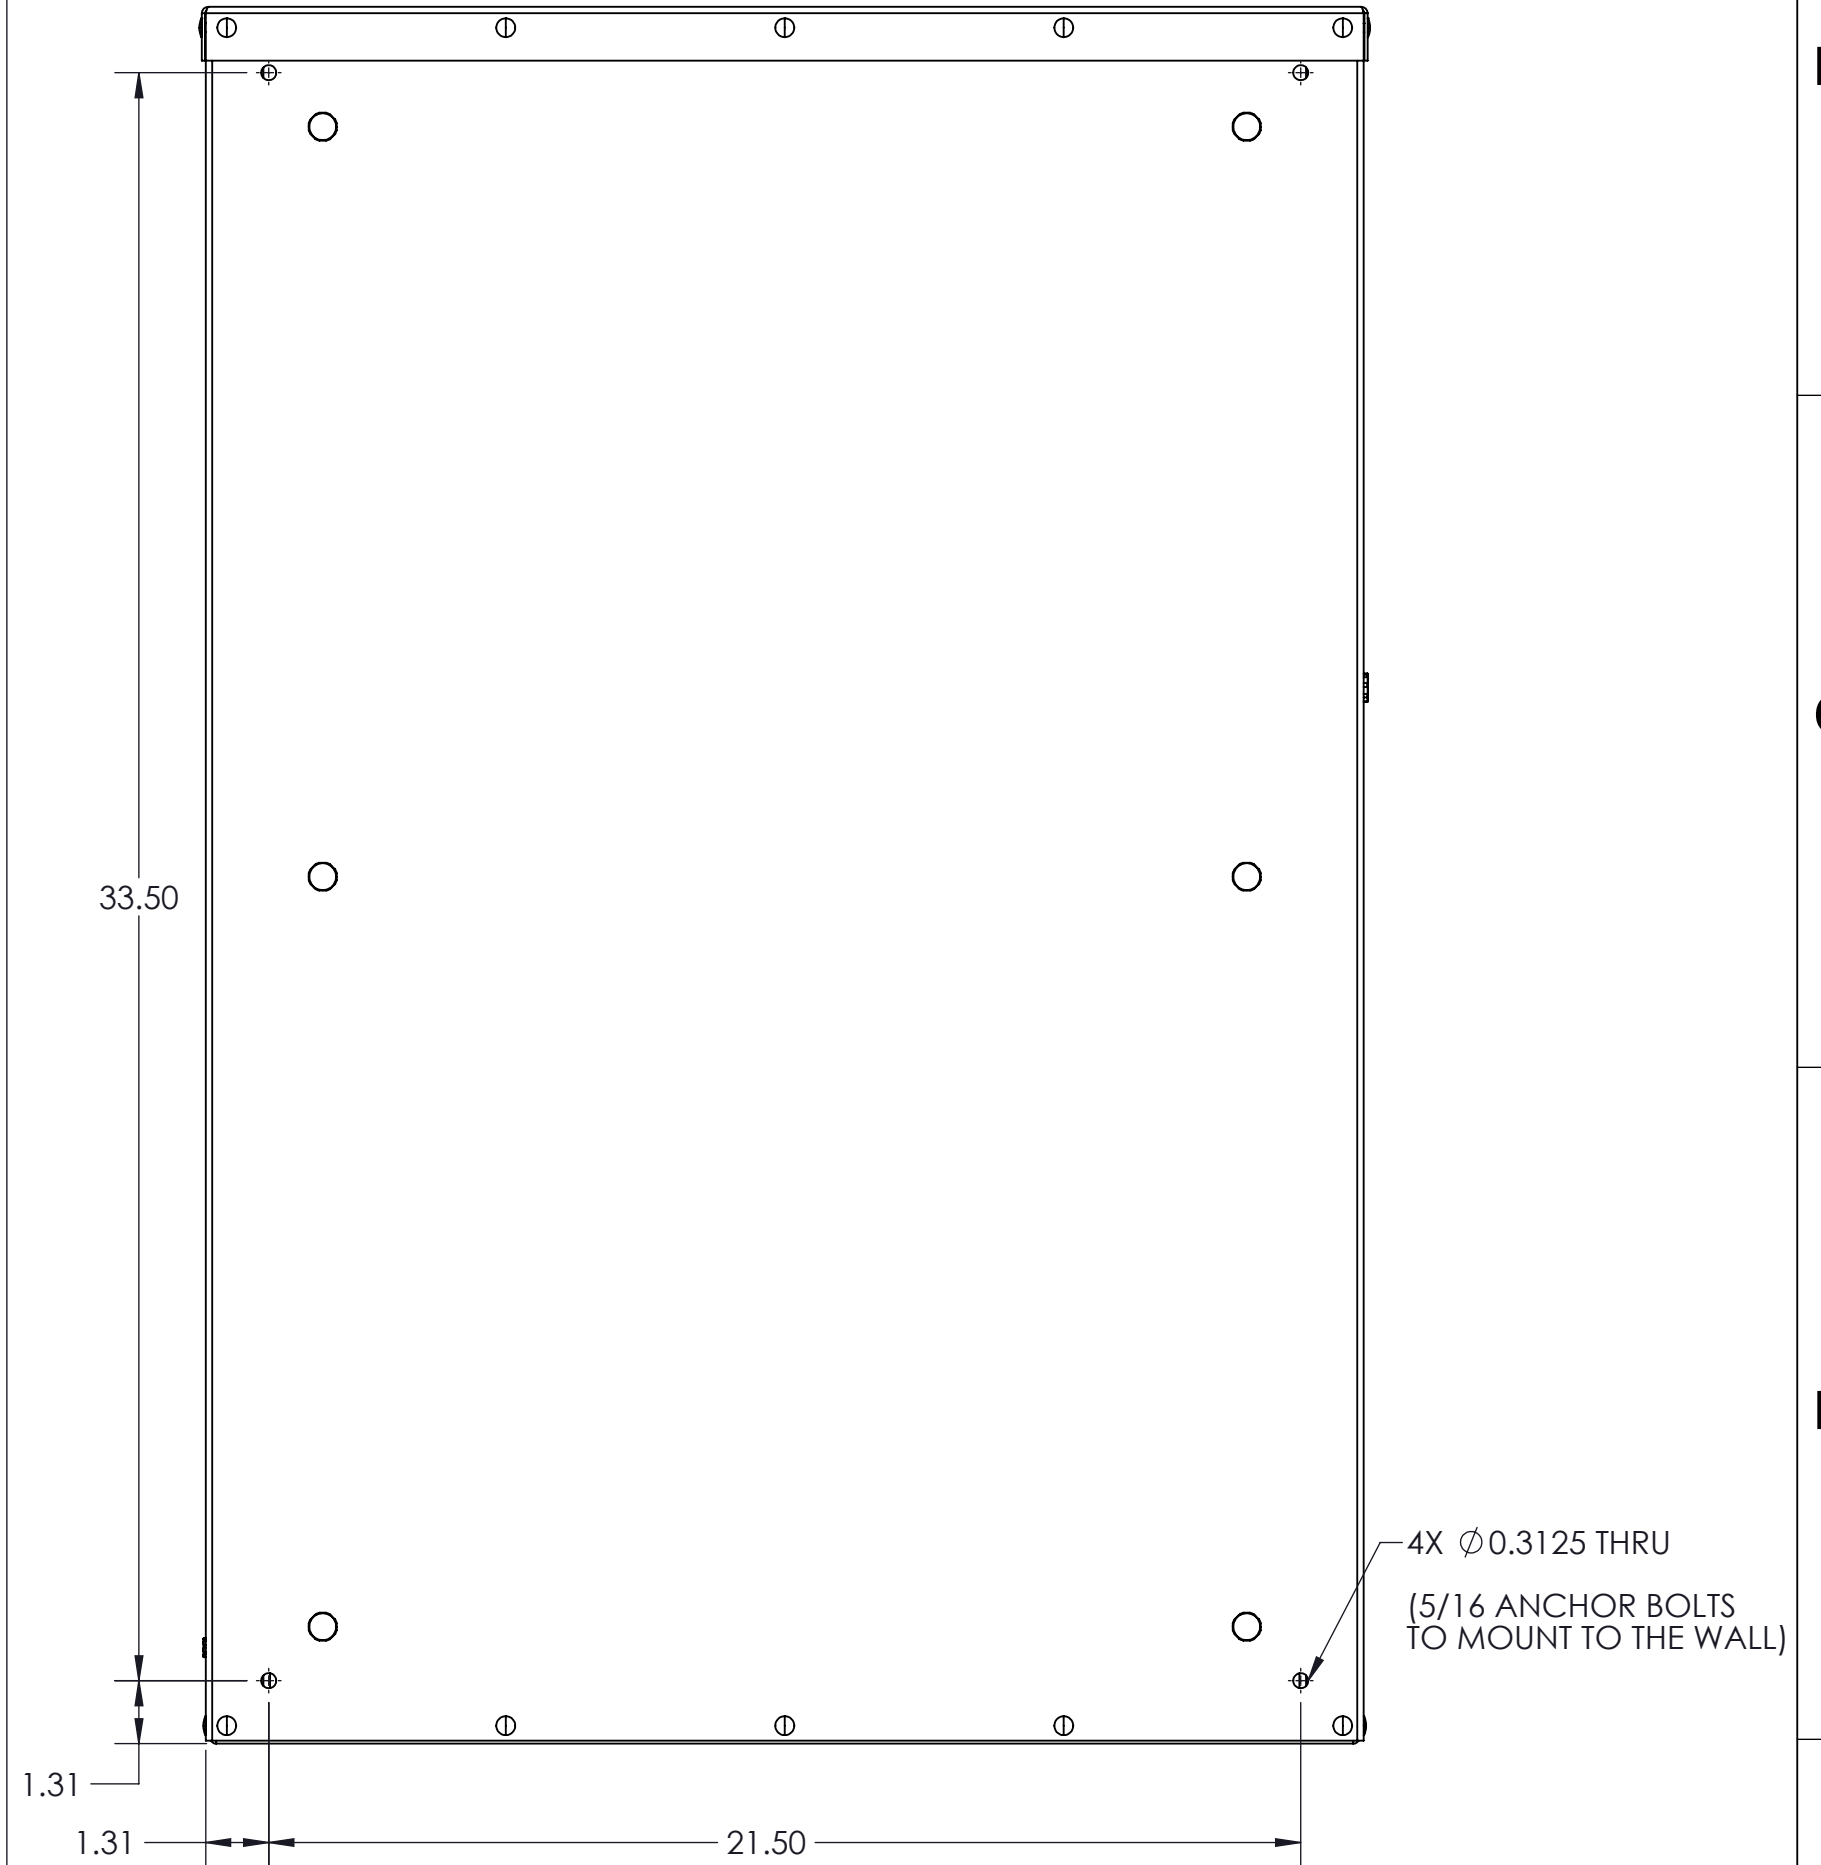

REAR VIEW

	REV A	DESCRIPTION T-SERIES ATS: 200A	
	THIRD ANGLE 	DWG/PART NO. TATS-200	
ECR #:		MASS (LBS): 100 LBS	
		THIS DRAWING IS THE PROPERTY OF MAVERICK POWER AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED USED OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY MAVERICK POWER.	SHT 2 OF 2