


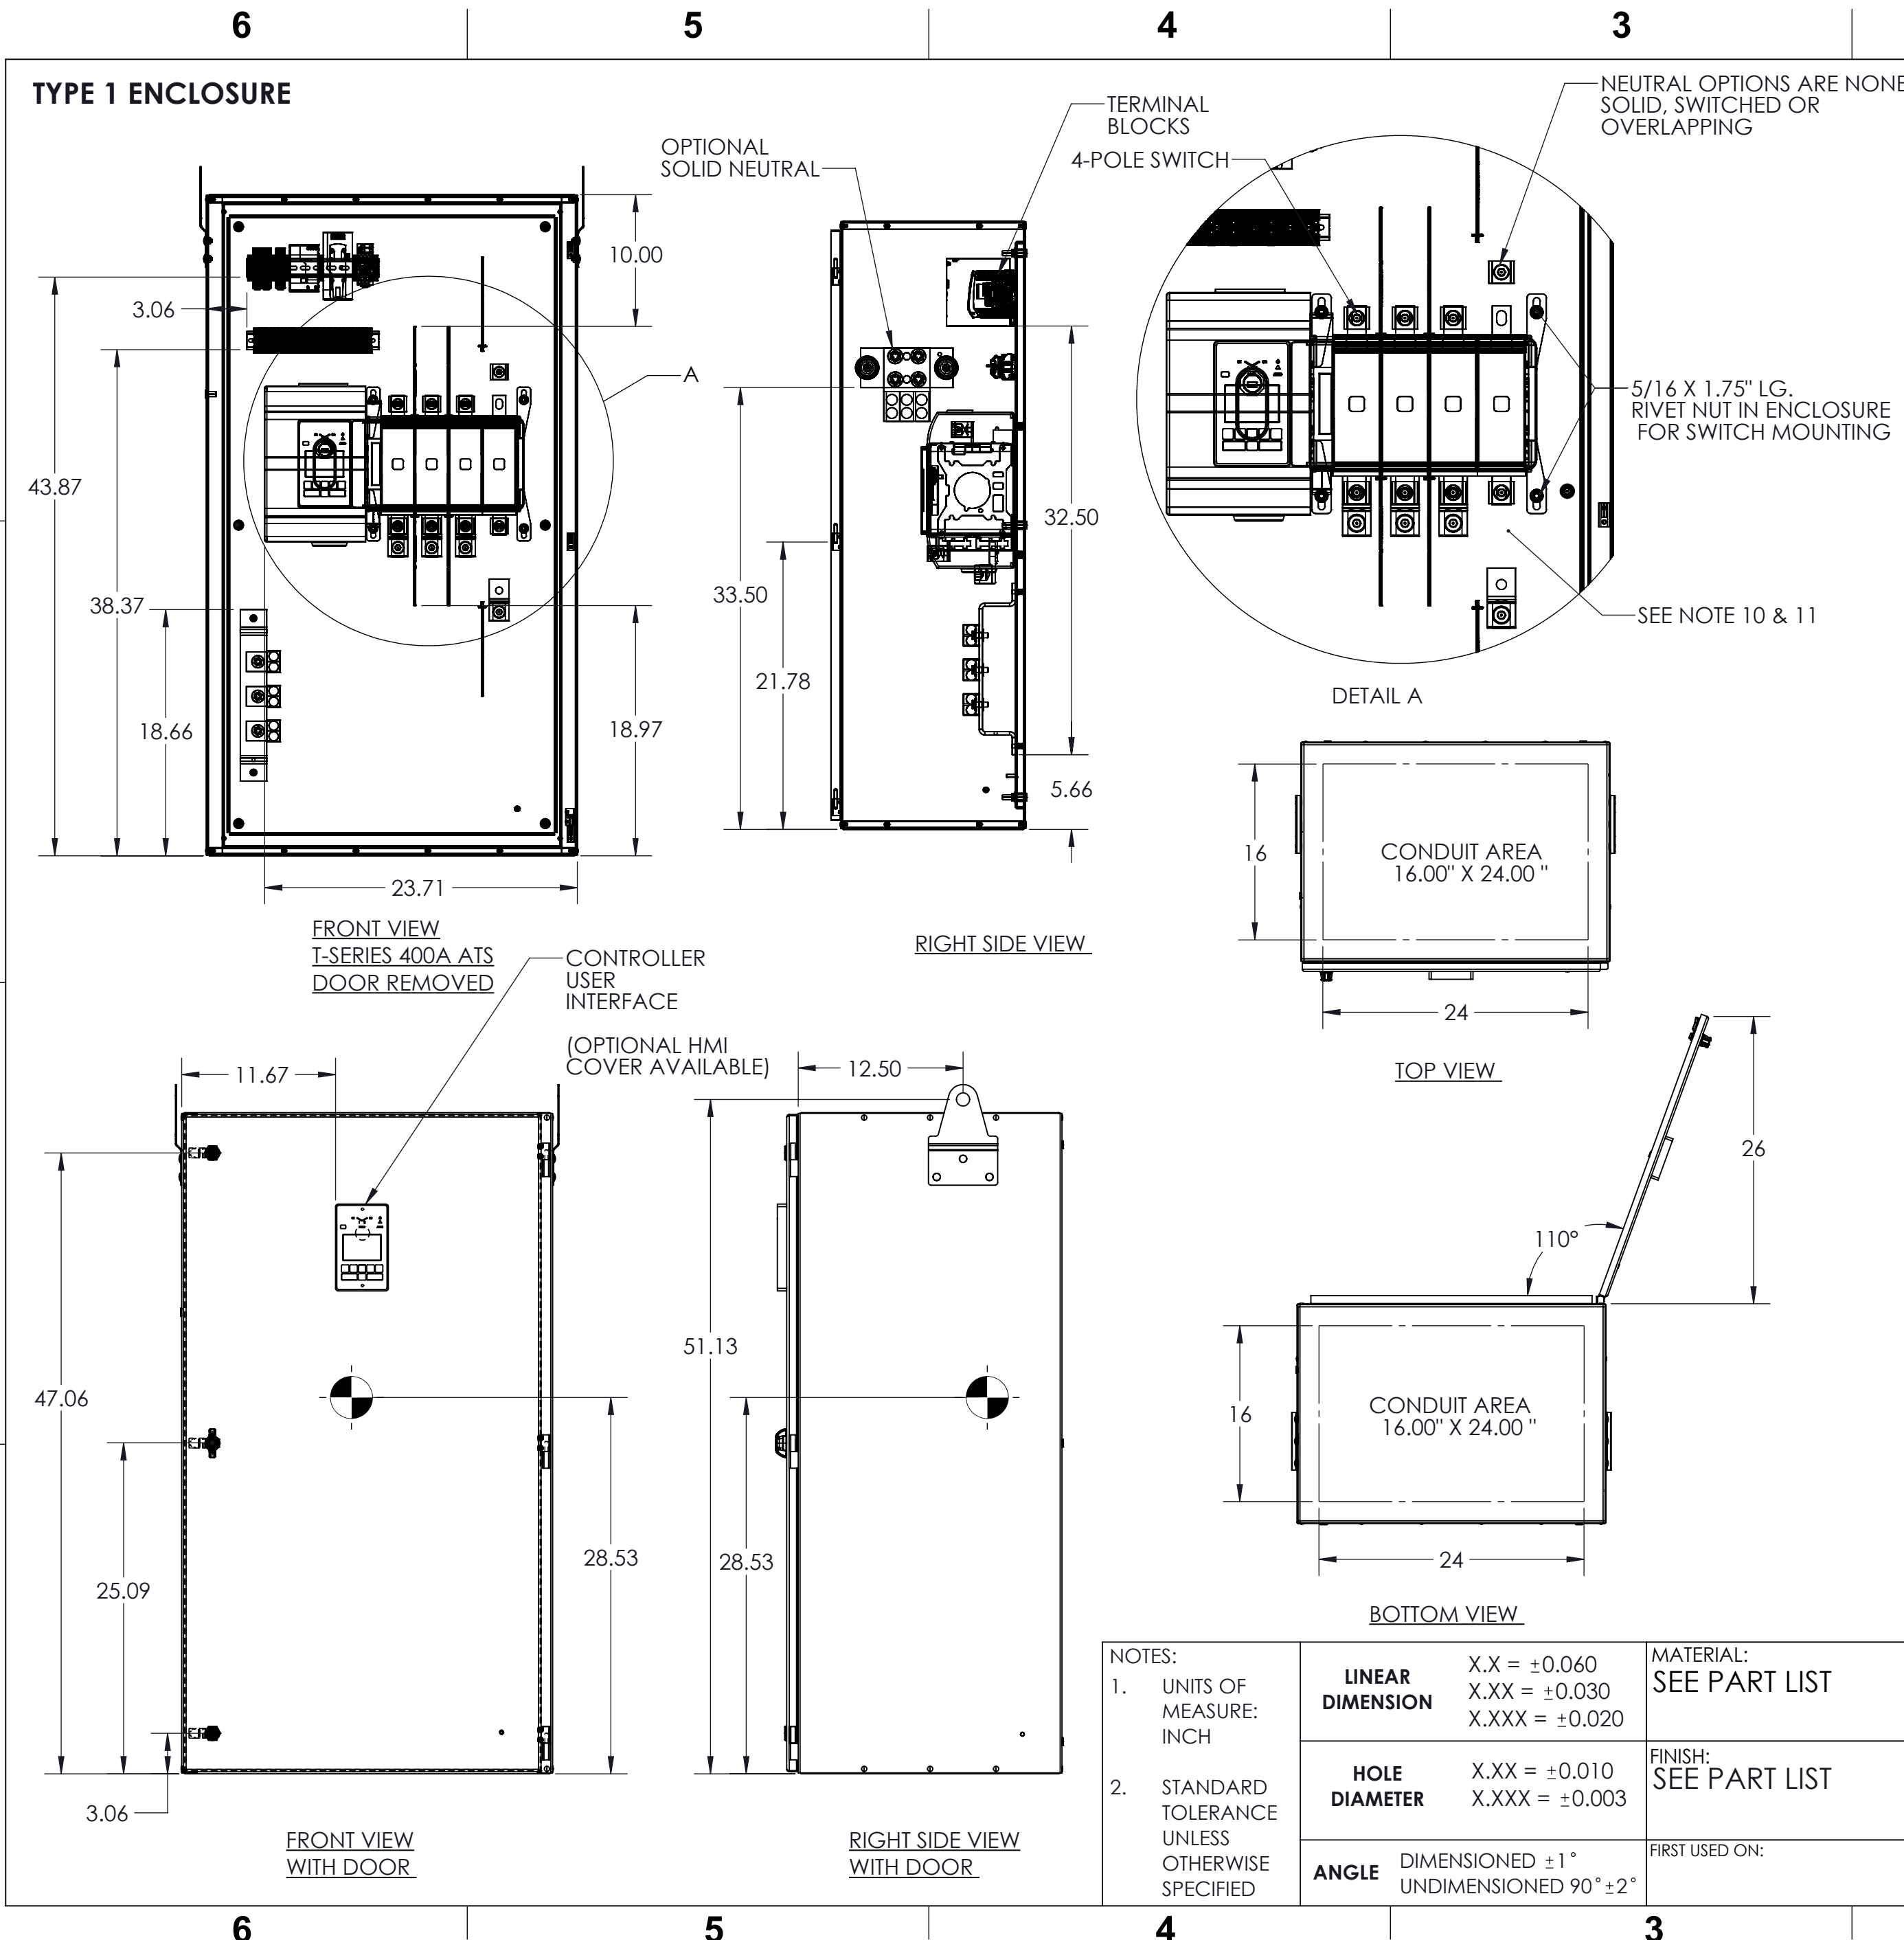


GENERAL NOTES

1. TYPE 1, 3R, 4/12,4X (304 or 316 SST) ENCLOSURE, FREE STANDING. FLOOR MOUNTED OR WALL MOUNTED. 12 GAUGE CONSTRUCTION.
2. NEC STANDARD GAUGE PAN TYPE DOOR WITH LOCKABLE HANDLE.
3. ACCESSIBILITY : DOOR EQUIPPED WITH LOCKING HANDLE
4. ENTRY: TOP & BOTTOM
5. FINISH: ANSI 61 TEXTURED GRAY POWDER COAT
6. RECOMMENDED CLEARANCES FOR DOOR OPENING:
FRONT: 28", 90 DEG. 26" AT FULL 110 DEG
7. SYSTEM VOLTAGE: 208-480 V, 1-PHASE OR 3-PHASE
8. SYSTEM AMPERAGE : 400A
9. UL 1008 LISTED, cUL CERTIFIED TO CSA 22.2, NO 178. EQUIPMENT MARKED cULus.
10. STANDARD ATS COMES WITH S1 AND S2 TERMINALS AT THE BOTTOM AND THE LOAD TERMINALS AT THE TOP. A FACTORY OPTION IS AVAILABLE TO REVERSE THE TERMINAL ORIENTATION.
11. SWITCH AVAILABLE IN 2,3 OR 4 POLE. 4 POLE SWITCH SHOWN



ESTIMATED SHIPPING WEIGHT OF THE UNIT: 295 LBS

CONNECTION DATA		
T-SERIES 400A ATS	PHASE & NEUTRAL*	ONE (1) #2 - 600 KCMIL CU/AL CABLES
	GROUND	SIX (6) #2 - 250 MCM CU/AL CABLE CONNECTIONS

* COMES STANDARD WITH MECHANICAL LUGS. ATS MAY BE PROVIDED WITHOUT LUGS OR WITH COMPRESSION LUGS UP TO TWO(2) 500 KCMIL PER POLE, INCLUDING NEUTRAL LUGS.


NOTES: 1. UNITS OF MEASURE: INCH 2. STANDARD TOLERANCE UNLESS OTHERWISE SPECIFIED	LINEAR DIMENSION	X.X = ± 0.060 X.XX = ± 0.030 X.XXX = ± 0.020	MATERIAL: SEE PART LIST		REV A	DESCRIPTION T-SERIES ATS:400A	
	HOLE DIAMETER	X.XX = ± 0.010 X.XXX = ± 0.003	FINISH: SEE PART LIST	ECR #:	THIRD ANGLE 	DWG/PART NO. TATS-400	
	ANGLE	DIMENSIONED $\pm 1^\circ$ UNDIMENSIONED $90^\circ \pm 2^\circ$	FIRST USED ON:	MASS (LBS): 295 LBS	THIS DRAWING IS THE PROPERTY OF MAVERICK POWER AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED USED OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY MAVERICK POWER.		SHT 1 OF 2

TYPE 3R/ 4/12, 4X ENCLOSURE

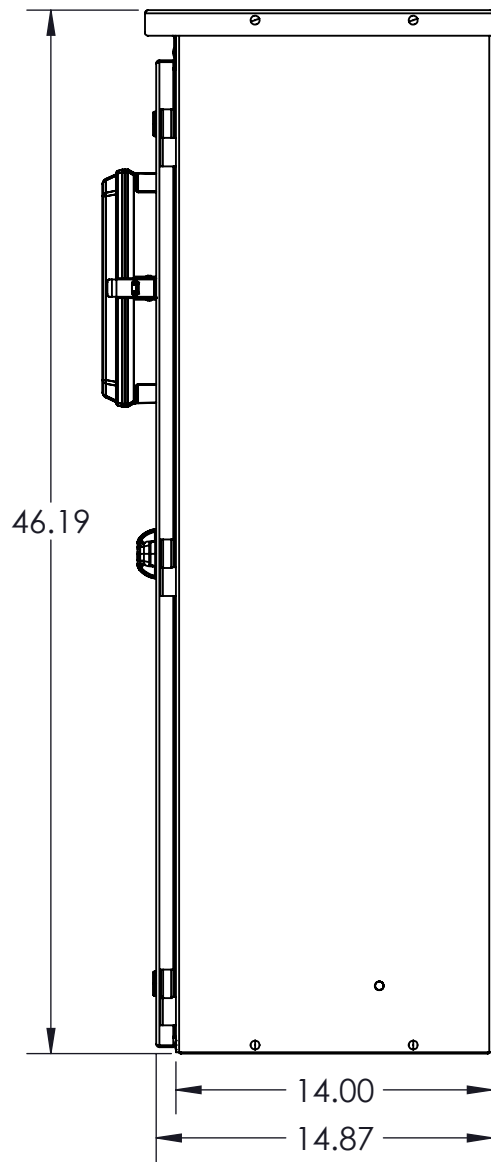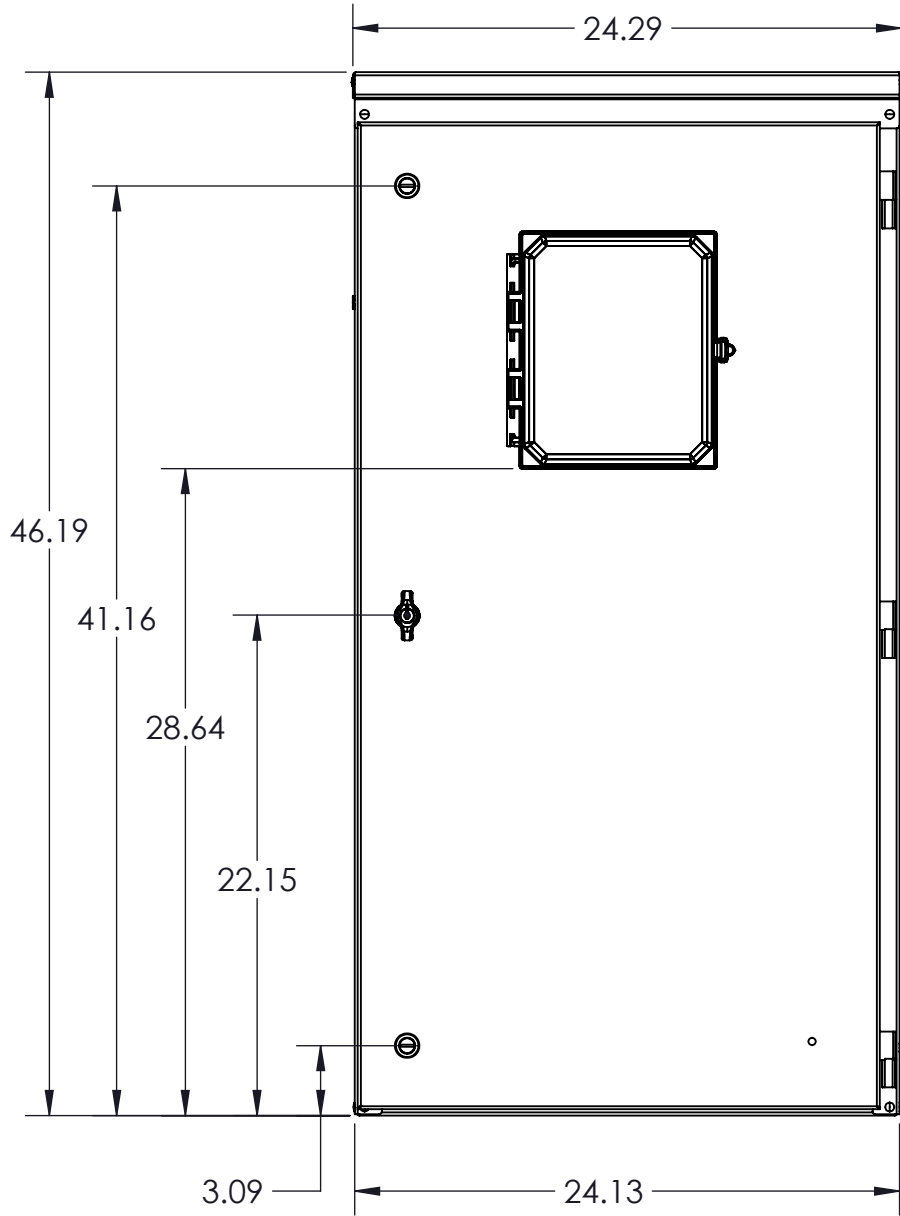


TYPE 3R,4/12,4X


REQUIRED HMI COVER
FOR TYPE 3R, 4/12/ 4X

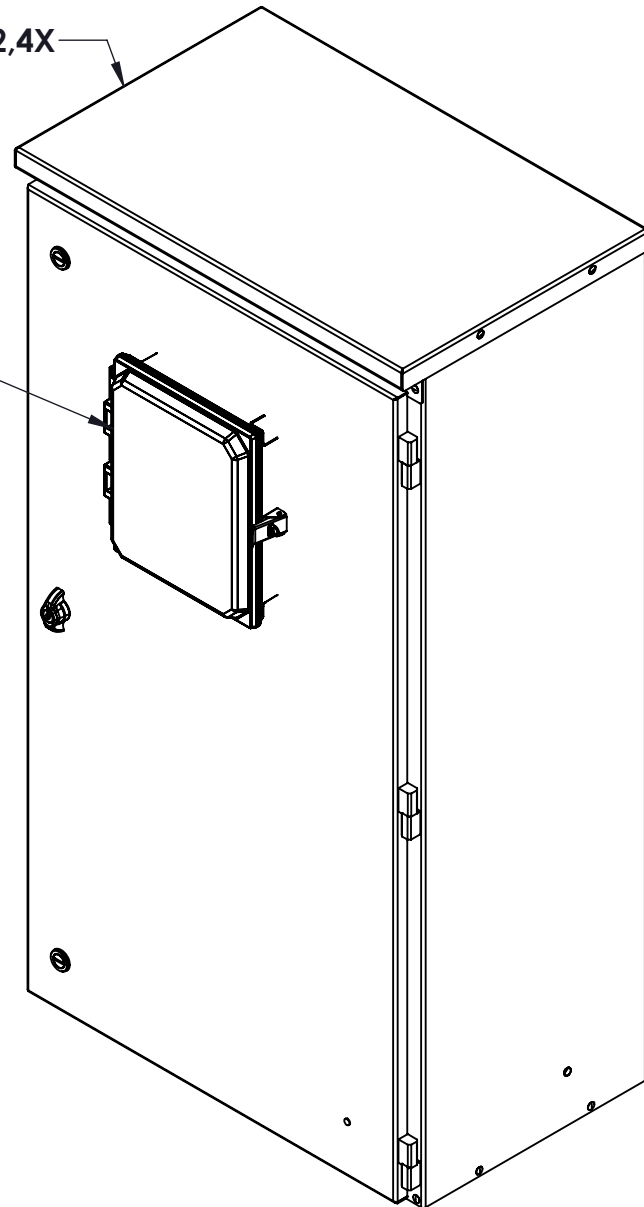

MOUNTING DETAILS
(WALL MOUNTED)

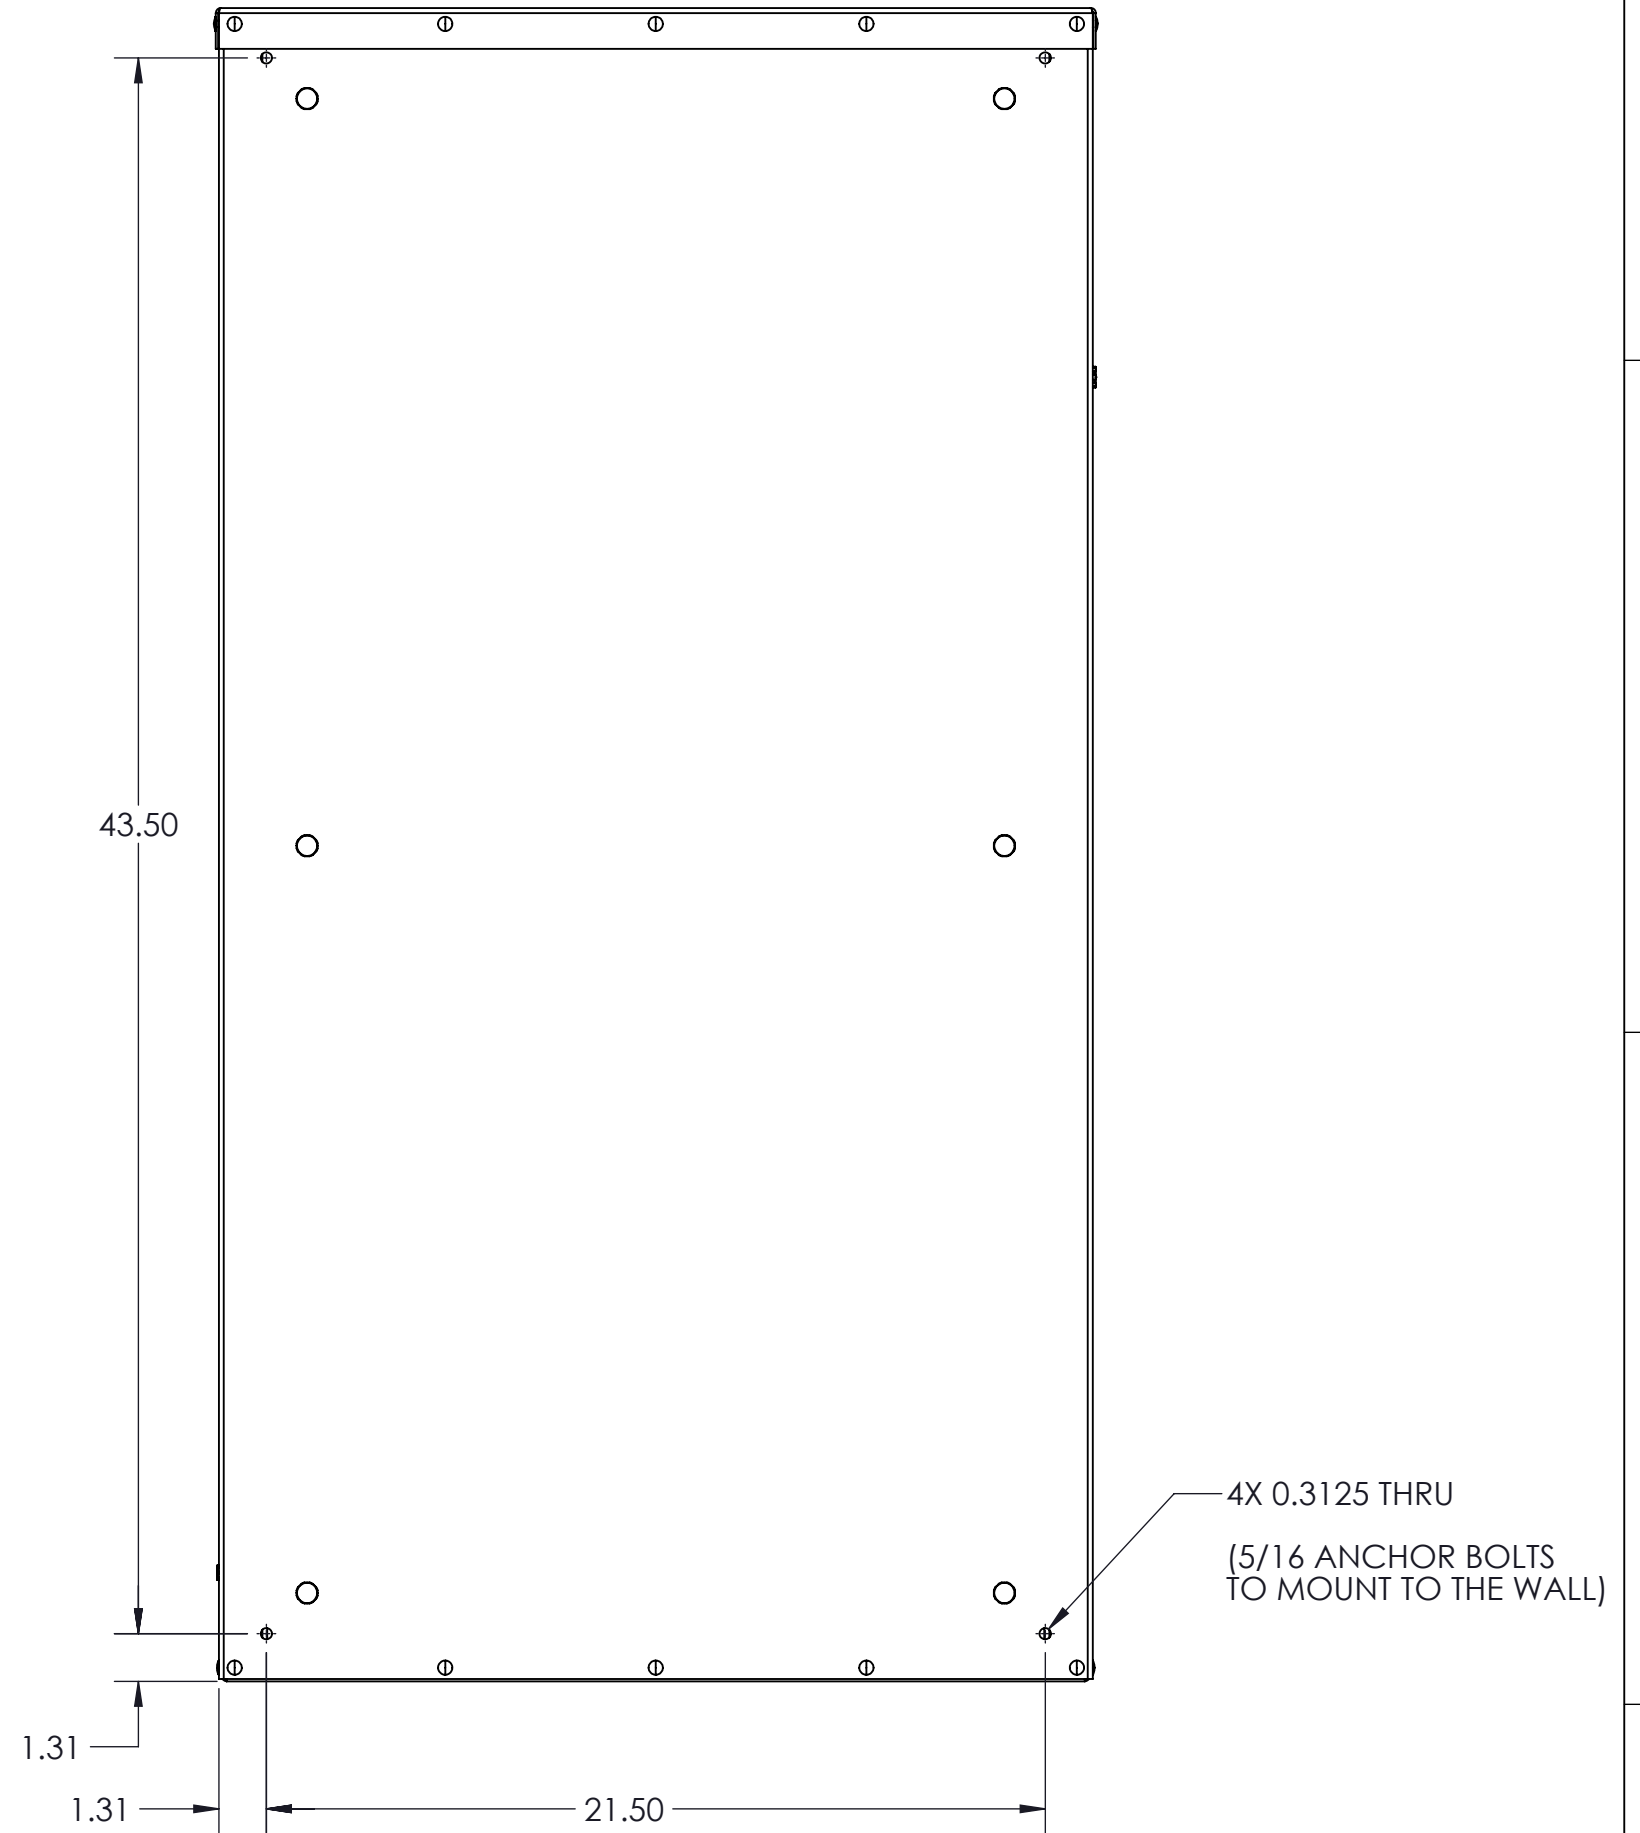

REAR VIEW

	REV A	DESCRIPTION T-SERIES ATS: 400A	
	THIRD ANGLE 	DWG/PART NO. TATS-400	
MASS (LBS): 295 LBS		THIS DRAWING IS THE PROPERTY OF MAVERICK POWER AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED USED OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY MAVERICK POWER.	

DO NOT SCALE DRAWING

SHT 2 OF 2