
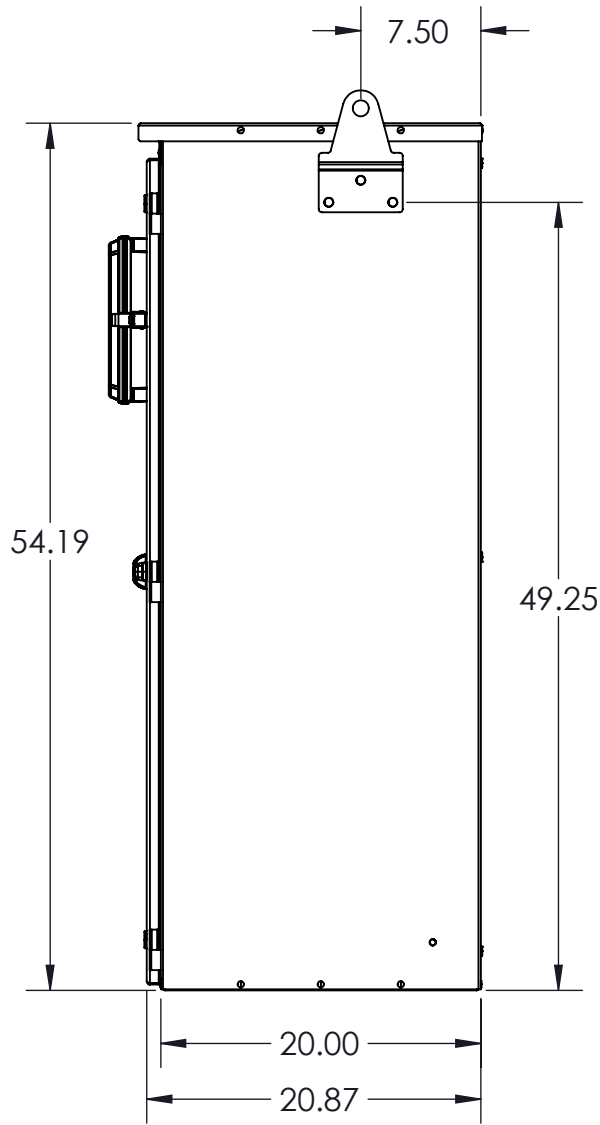
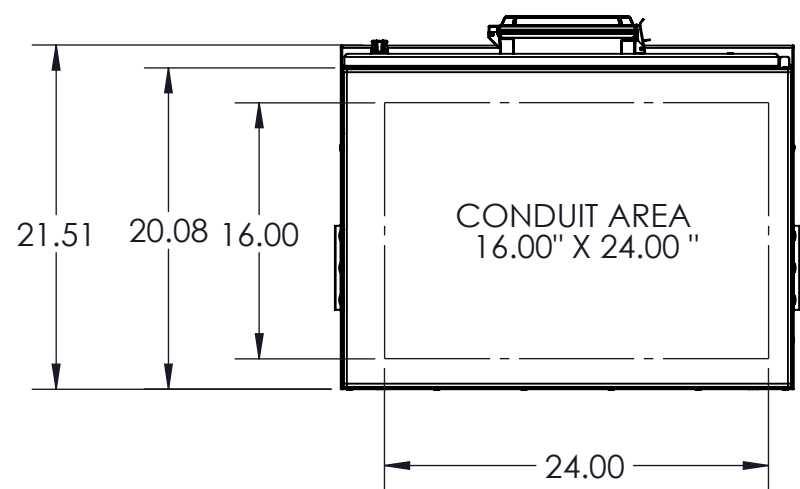


[illegible][illegible]

CONNECTION DATA		
T-SERIES 600A ATS	PHASE & NEUTRAL*	ONE (1) LUG PER PHASE SUITABLE FOR TWO (2) #2 - 600 MCM CU/AL CABLES
	GROUND	SIX (6) #2 - 250 MCM CU/AL CABLE CONNECTIONS


* COMES STANDARD WITH MECHANICAL LUGS. ATS MAY BE PROVIDED WITHOUT LUGS OR WITH COMPRESSION LUGS UP TO TWO(2) 500 KCMIL PER POLE, INCLUDING NEUTRAL. LUGS PROVIDED FOR EACH SOURCE AND LOAD.

TYPE 3R/ 4/12, 4X ENCLOSURE

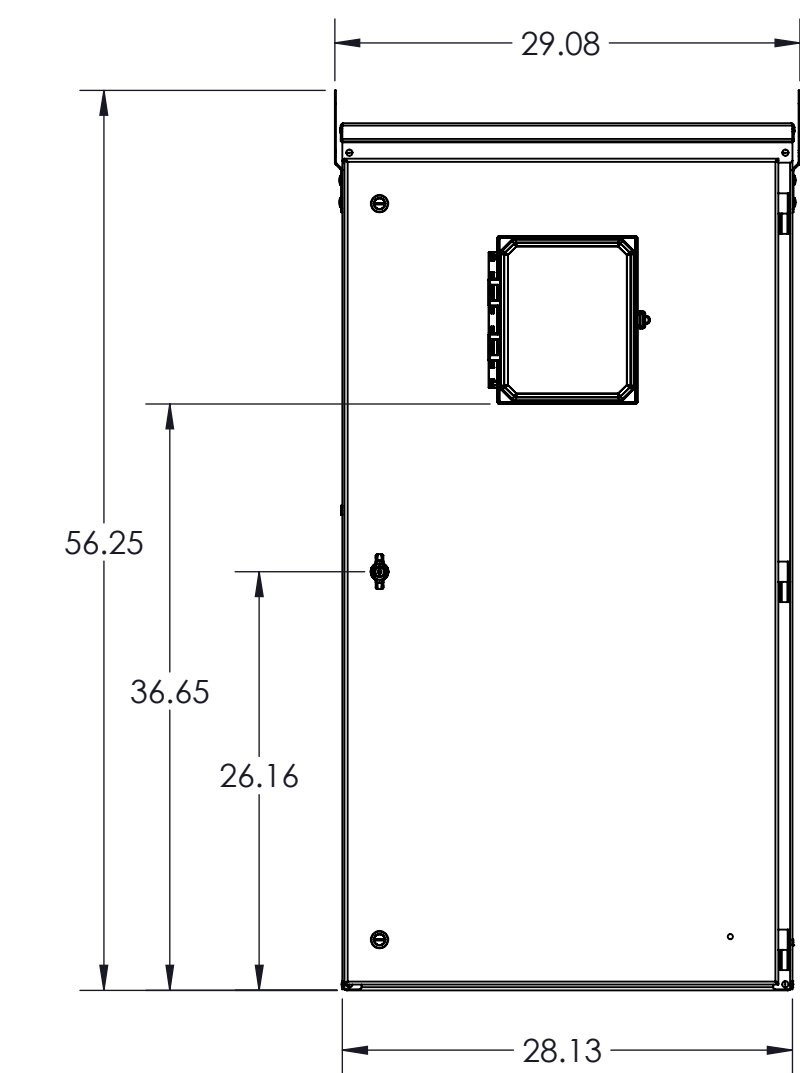


TYPE 3R,4/12,4X


REQUIRED HMI COVER
FOR TYPE 3R, 4/12/ 4X

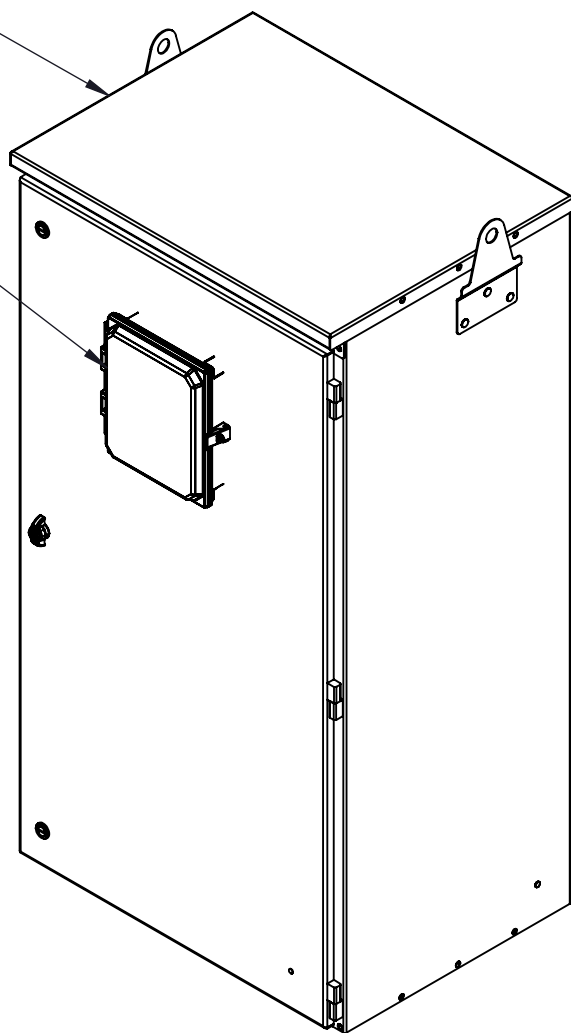

MOUNTING DETAILS
(WALL MOUNTED)

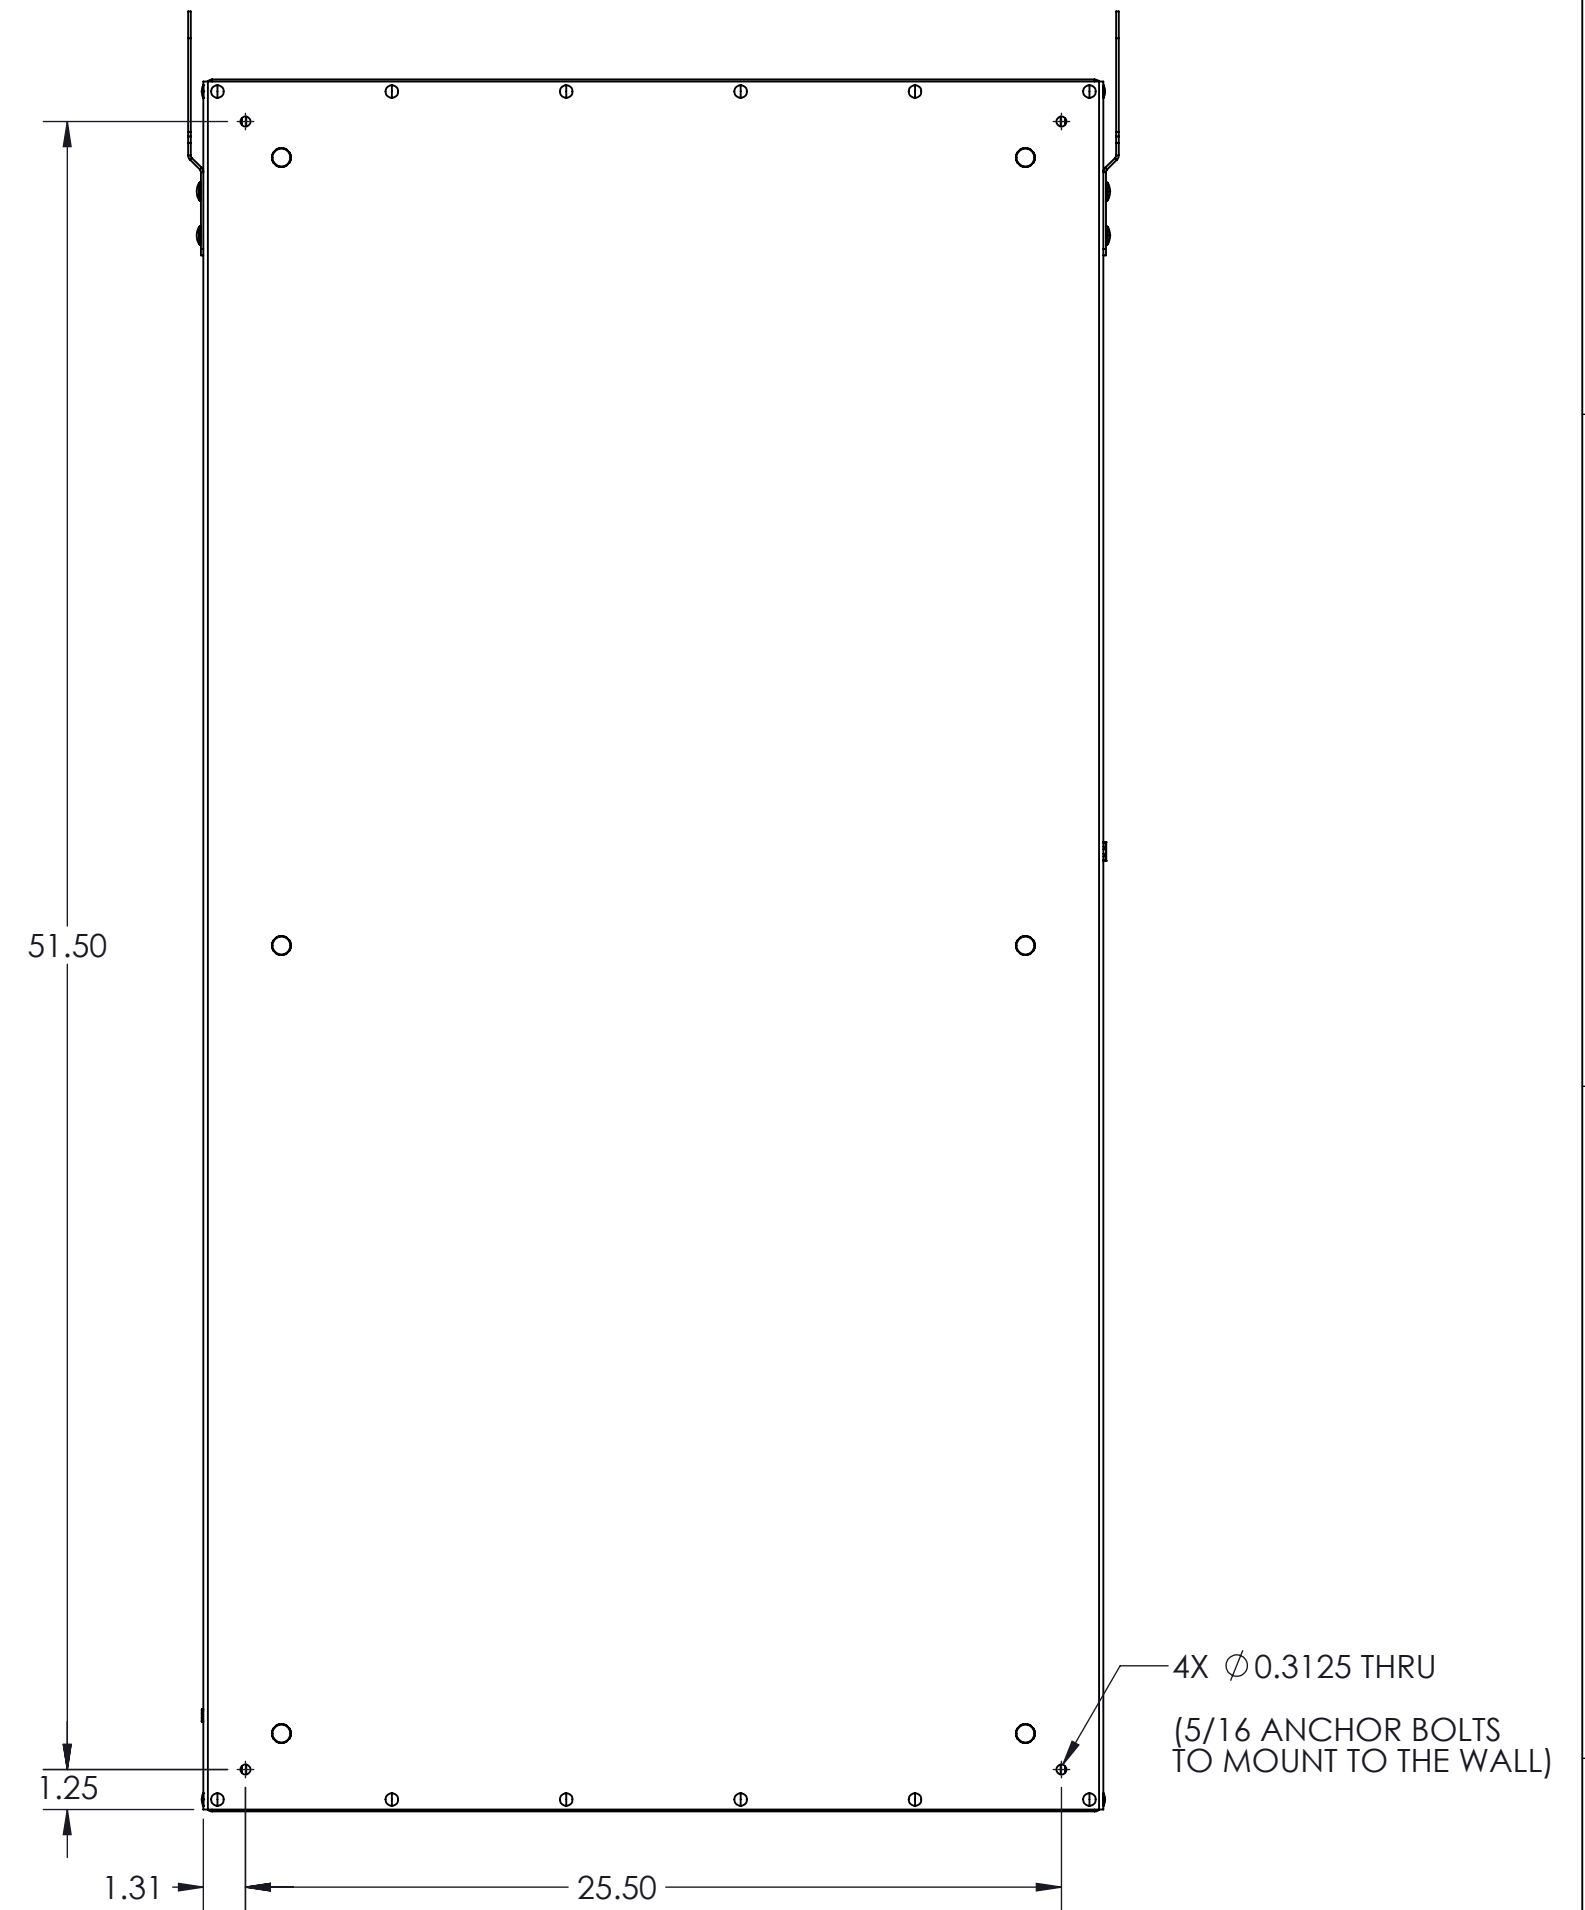

REAR VIEW

	REV A	DESCRIPTION T-SERIES ATS: 600A	
	THIRD ANGLE 	DWG/PART NO. TATS-600	
MASS (LBS): 310 LBS	THIS DRAWING IS THE PROPERTY OF MAVERICK POWER AND CONTAINS PROPRIETARY AND CONFIDENTIAL INFORMATION WHICH MUST NOT BE DUPLICATED USED OR DISCLOSED OTHER THAN AS EXPRESSLY AUTHORIZED BY MAVERICK POWER.	SHT 2 OF 2	

DO NOT SCALE DRAWING